


FOR COMPRESSION LOADS OF 56 TO 142 lbf  
SHEAR LOADS OF 32 TO 64 lbf

PHONE: 516.328.3300 • FAX: 516.326.8827 • WWW.SDP-SI.COM




► MATERIAL:

Fastener - Steel, Zinc Plated  
Isolator - Natural Rubber



► LOAD DEFLECTION GRAPHS:

Deflections below the line x-x are considered safe practice for static loads; data above that line are useful for calculating deflections under dynamic loads.

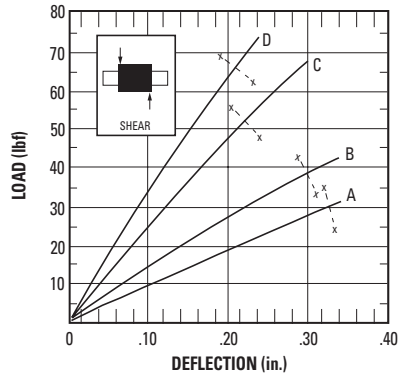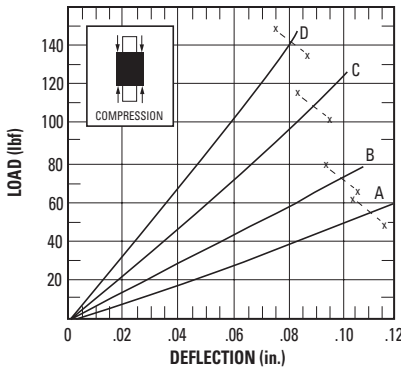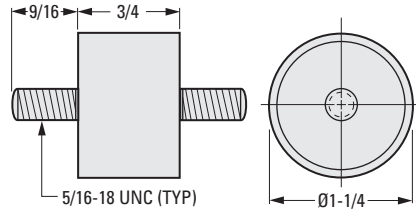

**INCH COMPONENT CATALOG NUMBER**

A 10Z 2-314

Load Rating  
A, B, C or D

Compression		Forcing Frequency in Cycles per Minute									
Load Rating	Maximum Load lbf	950	1100	1250	1500	1750	2000	2250	2500	3000	3600
		Minimum Load for 81% Isolation (lbf)									
A	56	—	—	—	50.0	38.0	28.5	22.5	18.0	12.5	—
B	73	—	—	—	73.0	51.0	39.0	30.5	24.5	16.5	12.0
C	109	—	—	—	—	85.0	63.5	50.0	41.0	28.0	20.0
D	142	—	—	—	—	129.0	99.0	78.0	64.0	44.0	30.0

Shear		Forcing Frequency in Cycles per Minute									
Load Rating	Maximum Load lbf	950	1100	1250	1500	1750	2000	2250	2500	3000	3600
		Minimum Load for 81% Isolation (lbf)									
A	32	23.0	18.0	14.5	10.0	7.5	*	*	*	*	*
B	38	32.0	24.5	19.0	13.0	9.5	7.0	*	*	*	*
C	51	—	44.5	36.0	26.0	19.5	14.0	12.0	10.0	*	*
D	64	—	58.0	46.5	34.0	27.0	20.5	17.0	14.0	9.5	*

\* At these forcing frequencies, lesser loads will yield less than 81% isolation.