


FOR LOADS OF 14 TO 37 lbf

PHONE: 516.328.3300 • FAX: 516.326.8827 • WWW.SDP-SI.COM

> MATERIAL:

Natural Rubber

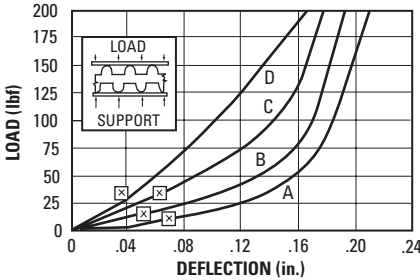

Deflections below the X are considered safe practice for static loads; data above the X are useful for calculating deflections under dynamic loads.


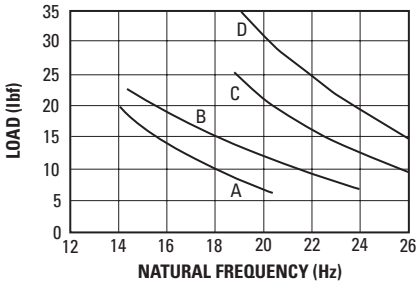


Fig. 1 Ring Style

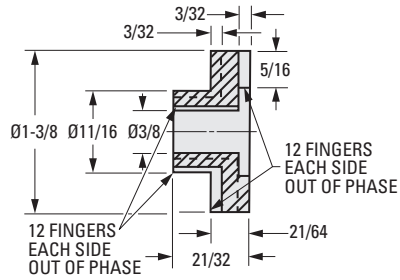


Fig. 2 Bushing Style

INCH COMPONENT

| Catalog Number | Hardness Durometer | Compression Max. Load lbf | Forcing Frequency in Cycles per Minute | | | | |
|----------------|--------------------|---------------------------|--|------|------|------|------|
| | | | 2000 | 2250 | 2500 | 2750 | 3000 |
| Fig. 1 | | | | | | | |
| A10R 4-1504A | 30 | 14 | — | 12 | 9 | 7 | 5 |
| A10R 4-1504B | 40 | 19 | 19 | 14 | 10 | 8 | 6 |
| A10R 4-1504C | 50 | 27 | — | 25 | 19 | 16 | 13 |
| A10R 4-1504D | 60 | 37 | — | — | 32 | 25 | 21 |
| Fig. 2 | | | | | | | |
| A10R 4-1505A | 30 | 14 | — | 12 | 9 | 7 | 5 |
| A10R 4-1505B | 40 | 19 | 19 | 14 | 10 | 8 | 6 |
| A10R 4-1505C | 50 | 27 | — | 25 | 19 | 16 | 13 |
| A10R 4-1505D | 60 | 37 | — | — | 32 | 25 | 21 |

I
R
T
1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16