

# CYLINDRICAL MOUNTINGS • TO 84 kgf



FOR COMPRESSION LOADS OF 42 TO 84 kgf  
SHEAR LOADS OF 16 TO 30 kgf

PHONE: 516.328.3300 • FAX: 516.326.8827 • WWW.SDP-SI.COM






### ► MATERIAL / FINISH:

Fastener - Steel, Zinc Plated  
Isolator - Natural Rubber

### ► LOAD DEFLECTION GRAPHS:

Deflections below the line x-x are considered safe practice for static loads; data above that line are useful for calculating deflections under dynamic loads.

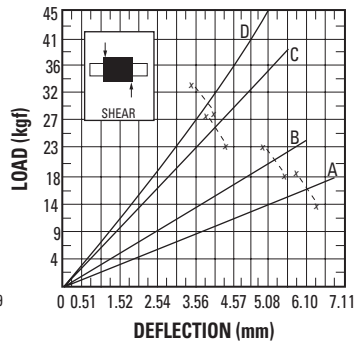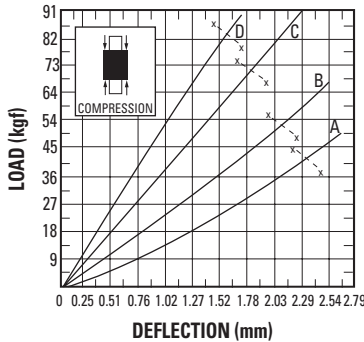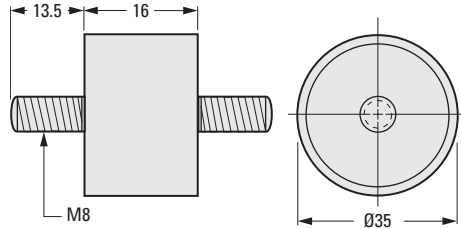

### METRIC COMPONENT CATALOG NUMBER

A 1 0 Z 2 M 3 1 2 M 0 8

Load Rating  
A, B, C or D

Compression		Forcing Frequency in Cycles per Minute									
Load Rating	Maximum Load kgf	950	1100	1250	1500	1750	2000	2250	2500	2750	3000
		Minimum Load for 81% Isolation (kgf)									
A	42.2	-	-	-	-	32.2	23.1	17.7	14.1	11.3	-
B	53.5	-	-	-	-	48.1	36.7	29	23.6	19.5	15.9
C	71.7	-	-	-	-	-	54.9	43.5	35.8	29.5	24.5
D	83.9	-	-	-	-	-	74.4	59.4	49.5	40.8	33.6

Shear		Forcing Frequency in Cycles per Minute									
Load Rating	Maximum Load kgf	950	1100	1250	1500	1750	2000	2250	2500	2750	3000
		Minimum Load for 81% Isolation (kgf)									
A	16.3	15.4	11.3	8.6	6.1	4.5	*	*	*	*	*
B	20.9	-	17.2	13.6	9.5	7.3	5.5	4.3	*	*	*
C	25.9	-	-	22.7	15.9	11.8	9.1	7.3	5.9	*	*
D	30.4	-	-	29.9	20.9	15.4	11.8	9.5	8.2	6.4	*

\*At these forcing frequencies, lesser loads will yield 81% isolation.

I

R

T

1

2

3

4

5

6

7

8

9

10

11

12

13

14

15

A