



FOR LOADS OF 6 TO 37 lbf

**> MATERIAL:**



Housing - Zinc Plated Steel with Clear Dichromate Sealer  
 Isolator - Rubber



Assembled style A10Z 4- mounts are supplied with rubber bushings and rings permanently installed within a convenient zinc plated metal mounting cup. Load is supported by the top surface of the assembly which has a 17/64 diameter clearance hole to accommodate a screw fastener from the load member. The cup base dimensions and mounting hole pattern conform to MIL size 2 specifications. The rubber isolation members are similar to the Finger Flex A10R 4-1504 and A10R 5-1505 series.

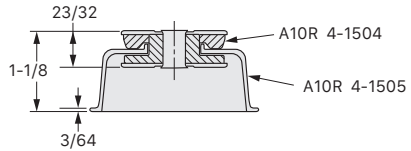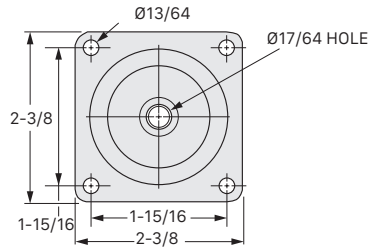

**NATURAL FREQUENCY: 6 – 30 Hz**

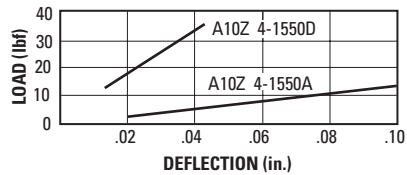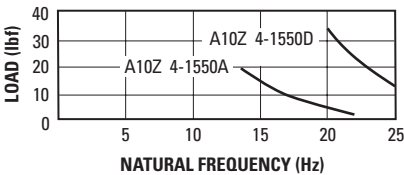

**INCH COMPONENT**

Catalog Number	Compression Load lbf per mount		Approximate Hardness Durometer
	Min.	Max.	
A10Z 4-1550A	6	20	30
A10Z 4-1550D	15	37	60