

MOLDED

PHONE: 516.328.3300 • FAX: 516.326.8827 • WWW.SDP-SI.COM

> **MATERIAL:**
Acetal, Black

> **SPECIFICATIONS:**
Bore is sized for press fit on standard shafting.
Use straight knurl for maximum torques.

Other bore sizes available on special order.


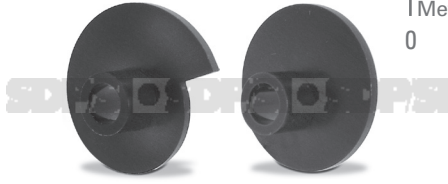


Fig. 1





Fig. 2




Fig. 3




Fig. 4




Fig. 5




Fig. 6

METRIC COMPONENT

Catalog Number	Fig. No.	d Bore	Rise per 15°
A 3Y 3M1M06	1	6	0.25
A 3Y 3M2M06	2		0.5
A 3Y 3M3M06	3		0.75
A 3Y 3M4M06	4		1
A 3Y 3M5M06	5		—
A 3Y 3M6M06	6		—

I

R

T

1

2

3

4

5

6

7

8

9

10

11

12

13

14

A

> MATERIAL:

Cam - Acetal, Black
 Insert - Brass

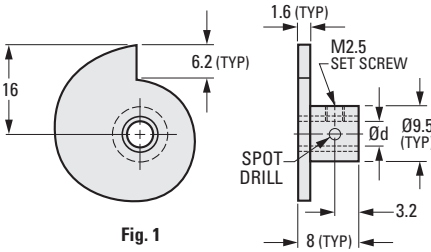




Fig. 1




Fig. 2




Fig. 3




Fig. 4




Fig. 5




Fig. 6

METRIC COMPONENT

Catalog Number	Fig. No.	d Bore +0.025 0	Rise per 15°
A 3Y 3M1Z03	1	3	0.25
A 3Y 3M1Z04		4	
A 3Y 3M2Z03	2	3	0.5
A 3Y 3M2Z04		4	
A 3Y 3M3Z03	3	3	0.75
A 3Y 3M3Z04		4	
A 3Y 3M4Z03	4	3	1
A 3Y 3M4Z04		4	
A 3Y 3M5Z03	5	3	—
A 3Y 3M5Z04		4	
A 3Y 3M6Z03	6	3	—
A 3Y 3M6Z04		4	

- I
- R
- T
- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9
- 10
- 11
- 12
- 13
- 14
- A